

**SPOOL DIMENSIONS** - (W) 0.32" x (H) 0.05" x (L) 16.4 ft. (5m)

**MAXIMUM RUN** - 16.4 feet (5m)

**WATTAGE** - 3.9 watts/ft.

**VOLTAGE** - 24VDC

**LAMPS** - LED SMD 2835, 126 LED's per meter. Spaced at 0.312" on center.

**FIELD CUTTABLE** - Every 2.19" inches.

**BEAM ANGLE** - 120 degrees.

**LUMEN OUTPUT** - 470 lumens/ft.



**COLORS** - White (2400K), White (2700K), White (3100K), White (4000K), White (6000K), Red, Green, Blue and Amber.


**LIFE HOURS** - 60,000 hours.

**ELECTRICAL** - Flexible circuit board ribbon. Additional aluminium heat sink may be required.

**MOUNTING OPTIONS** - Pre-applied 3M adhesive tape, mounting clips, and polycarbonate channels. Should custom requirements be necessary, please contact your local rep.

**WARRANTY** - 5 years from date of purchase.

**CRI** - 90+ **LISTING** -  Listed (E166352 IFDR) (E 348777),  approved.

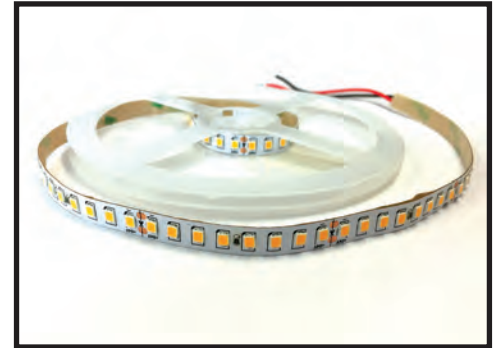

### ORDERING INFORMATION

CATALOG #	DESCRIPTION	LED COLOR
DSH-4.0-24V-W24	DSH-4.0-24V-W24	White (2400K) (SPECIAL ORDER)
DSH-4.0-24V-W27	DSH-4.0-24V-W27	White (2700K)
DSH-4.0-24V-W31	DSH-4.0-24V-W31	White (3100K)
DSH-4.0-24V-W40	DSH-4.0-24V-W40	White (4000K)
DSH-4.0-24V-W60	DSH-4.0-24V-W60	White (6000K) (SPECIAL ORDER)
DSH-4.0-24V-RD	DSH-4.0-24V-RD	Red (SPECIAL ORDER)
DSH-4.0-24V-GN	DSH-4.0-24V-GN	Green (SPECIAL ORDER)
DSH-4.0-24V-BL	DSH-4.0-24V-BL	Blue (SPECIAL ORDER)
DSH-4.0-24V-AM	DSH-4.0-24V-AM	Amber (SPECIAL ORDER)